

## QuickStart Setup Guide

## Master System Components

## System Requirements



Below, you can find the minimum and recommended requirements for systems running cameras using the default QVGA (320x240) settings. Running your cameras in the higher VGA (640x480) mode may require additional resources.

The WiLife Video Security System uses your Windows PC to record the video from your cameras and serve video to your remote devices. You need to have your PC on and running for the WiLife system to operate.

Requirement		Number of Cameras					
		1	2	3	4	5	6
<b>CPU Speed:</b>	Recommended	2.2 GHz	2.4 GHz	2.6 GHz	2.8 GHz	3.0 GHz	3.2 GHz
<b>Memory (MB):</b>	Recommended	512	512	512	768	1024	1024
<b>Video Card (MB):</b> DirectX 9 compatible	Recommended	32	32	64	128	128	256
<b>Display Resolution:</b>		1024 x 768 or higher, 32 bit color					
<b>Hard Drive (MB):</b>		100 MB for program and a minimum of 500+ MB for video storage.					
<b>Operating System:</b>		Microsoft® Windows® Vista™ or Microsoft® Windows® XP Home Edition XP Professional or XP Media Center Edition					
<b>Media Player:</b>		Microsoft Windows Media® Player 9 or later					

\* Intel® Pentium 4 CPU speed. Dual-core Intel and AMD processors deliver similar performance at lower clock speeds.

\*\*Microsoft Vista requires more memory to deliver equal performance.

# Logitech Spy Camera Master System™

**Congratulations** on purchasing the WiLife Video Security System, an easy, professional, and complete digital security system that gives you the power to monitor what matters most to you.

With this Starter Kit, you have all of the components for a complete, professional-grade digital video surveillance system. This kit features the Spy Camera, which provides superior image quality and video performance. It also includes features like HomePlug networking, motion-based recording & alerts, and remote viewing.

This QuickStart Setup Guide will assist you in installing and setting up your own digital video surveillance system. Simply follow these instructions and you will be viewing live video from your Spy Camera in minutes.

- 1) Spy Camera  
2) USB Receiver Module  
3) USB Cable
- 4) Install CD includes:  
- WiLife Software  
- User's Manual

**Warning:** Due to the discreet nature of this camera, its use may be subject to national, state, and local laws respecting copyright, right of publicity, and privacy. Before using this camera you should become familiar with the pertinent laws, regulations, and community standards that may bear on the use, publication, or distribution of recordings to ensure compliance with applicable laws.

## Computer Firewall Troubleshooting


When the WiLife Command Center first runs, you may be prompted by your firewall to allow WiLife to access the network. You should always answer, "Yes." This allows WiLife to communicate with the cameras and remote devices.



Modern design and styling ensure that the spy camera looks natural, wherever you choose to position it.


## Step 1 Run the Setup Wizard

Please read all instructions before starting the installation. We encourage you to exit all other programs.

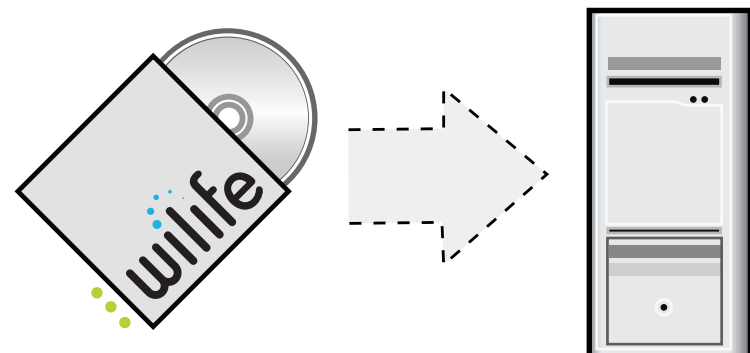


- Insert the WiLife Install CD.
- Click on the option "Install WiLife Software."
- Continue following the instructions on each screen of the InstallShield Wizard.

## Step 2 Plug in USB Receiver

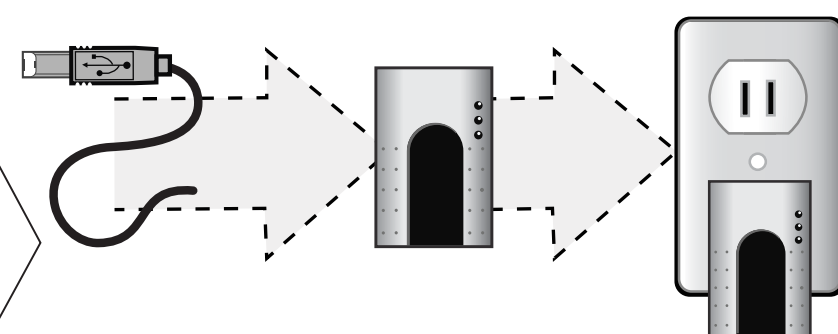


- When you see the "Plug in Receiver" screen, plug one end of the USB cable into the USB Receiver. Plug the USB Receiver into the wall plug.

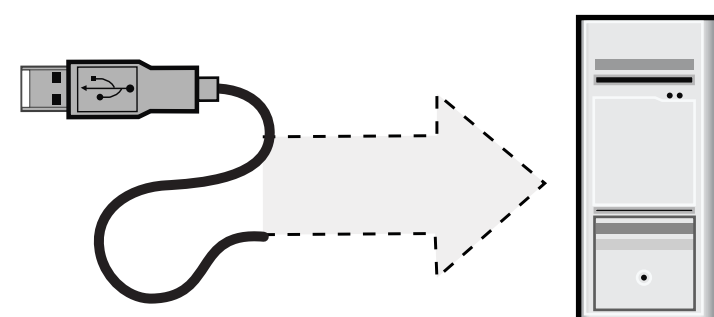


- Connect the USB cable to the USB port on your PC.

## Step 3 Plug in the Spy Camera

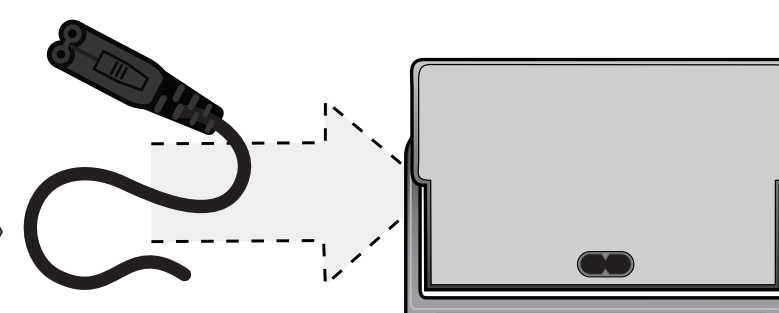

- Plug the supplied power cable into the back of the Spy Camera.

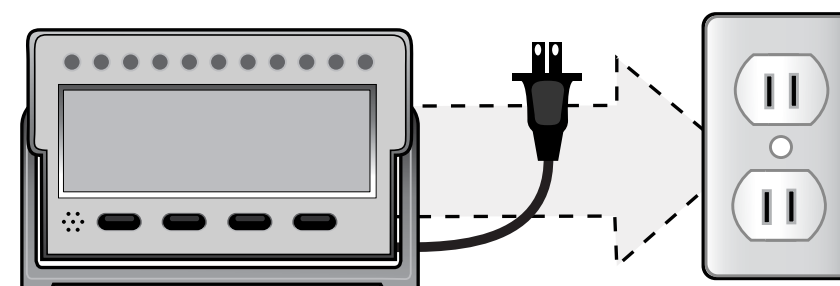

- Plug the clock into your wall outlet.
- Continue with the software installation process.
- When installation is complete, restart your PC.

## Build a Complete Surveillance System

The WiLife Video Security System is available online at [www.wilife.com](http://www.wilife.com) and at other select retail stores and authorized resellers. Visit [www.wilife.com](http://www.wilife.com) to find a store or reseller near you.



Add-on Indoor Camera



Add-on Outdoor Camera



Add-on Spy Camera

## Notes:

- If the Wizard does not automatically load, manually start the Wizard by running the setup.exe file on the CD.
- The Wizard checks to see if Microsoft® .NET framework exists on your PC. If Microsoft.NET is not currently installed on your PC, the InstallShield Wizard will install it for you. If the Installer has to load .NET, you will need to restart Windows after .NET is installed.
- Exiting WiLife Command Center:
  - 1) Click the "x" icon in WiLife. Though the WiLife interface is not showing, the system is still running (recording) in Background Mode.
  - 2) Go to the system tray and click on the WiLife icon – the one that looks like an Indoor Camera.
  - 3) Right-click on the icon and select "Exit" from the list of options.

## Caution:

- To ensure a quality connection, do NOT plug the USB Receiver or Camera into a surge protector or powerstrip. These devices already have built-in surge protection and must be plugged directly into your wall outlet.

## Setting the Time:

- +/- Hold down the button at the same time as the 12:-- or --:00 to change hours or minutes.
- 12/24 Press and release button to toggle between 12-hour standard time or 24-hour military time
- 12:-- Holding down the +/- button, press 12:-- until the desired hour shows.
- --:00 Holding down the +/- button, press --:00 until the desired minute shows.

